


- ① GUTTER SHALL SLOPE 0.50 INCH PER FOOT FOR SPILL CURB AND 1.0 INCH PER FOOT FOR CATCH CURB.

CURB RADII


A=1/8" TO 1/4"
B=1"
C=1-1/2"
D=1-1/2" TO 2"

STANDARD MEDIAN CURB & GUTTER

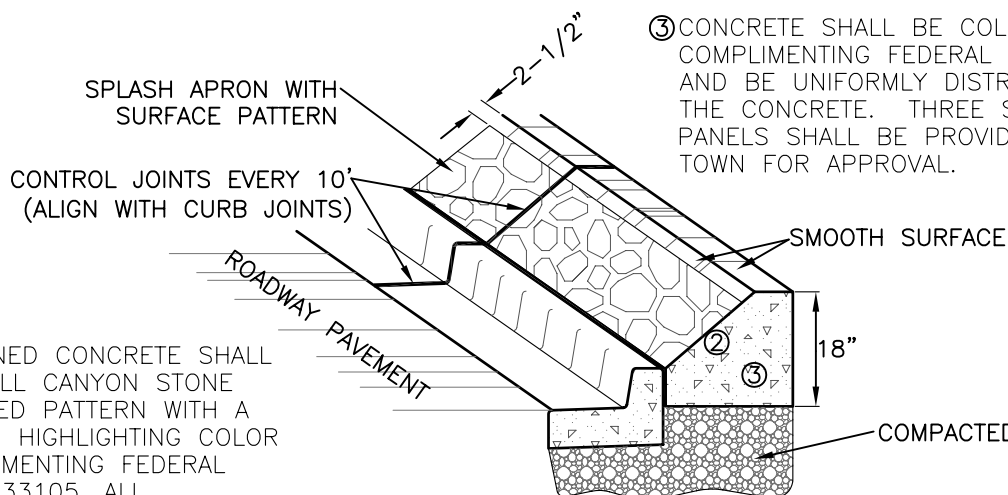

- ② PATTERNED CONCRETE SHALL BE SMALL CANYON STONE TEXTURED PATTERN WITH A SECOND HIGHLIGHTING COLOR COMPLEMENTING FEDERAL COLOR 33105. ALL HIGHLIGHTING COLORS SHALL BE APPROVED BY THE TOWN.

- ③ CONCRETE SHALL BE COLORED COMPLEMENTING FEDERAL COLOR 32516 AND BE UNIFORMLY DISTRIBUTED THROUGH THE CONCRETE. THREE SAMPLE COLOR PANELS SHALL BE PROVIDED TO THE TOWN FOR APPROVAL.

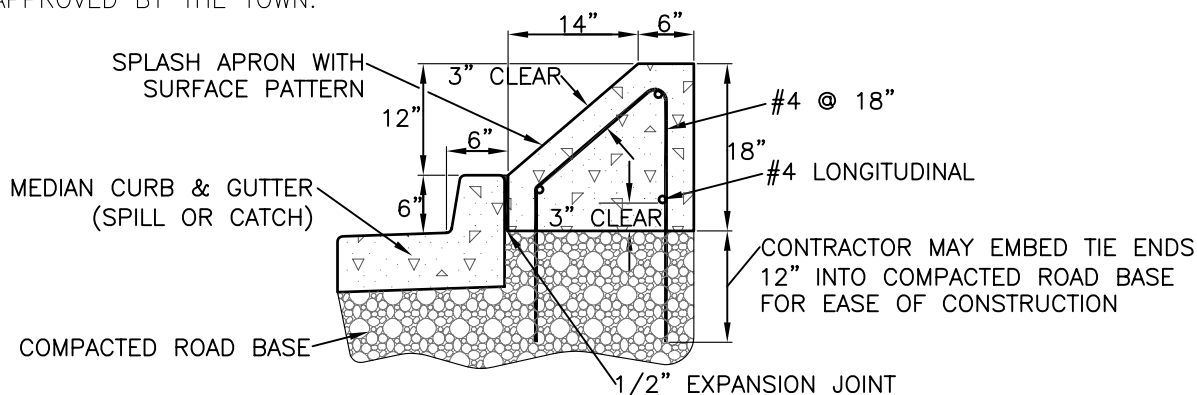

CROSS SECTION

NOTES:

1. CONTRACTOR SHALL COORDINATE THE LOCATIONS OF ALL SIGN POSTS. CORING INTO CONCRETE IS NOT PERMITTED.
2. ANY MEDIAN TREES SHALL BE TRIMMED SO THE MINIMUM BRANCH HEIGHT IS 8' ABOVE THE GUTTER.
3. THE TOWN ENGINEER MAY REQUIRE A DRAINAGE SYSTEM IF AN IRRIGATION SYSTEM IS PROPOSED WITHIN THE MEDIAN.

STANDARD DETAIL FOR RAISED MEDIAN WITH SPLASH APRON-SPILL OR CATCH CURB

NTS

